




C911800

Arc Flash Twin Leg Energy Absorbing Lanyard

FEATURES

- 1¾ inch Kevlar® Webbing
- SIGMA™ flame resistant (FR) shock pack cover and protective label cover
- Aluminum Mega Hooks have a 4 inch gate opening
- Snap Hook and Mega Hooks are self-locking with a minimum tensile break strength of 5,000 pounds, and a 3,600 pound gate rating
- Meets requirements of ASTM F887
- Meets requirements of ANSI Z359.13

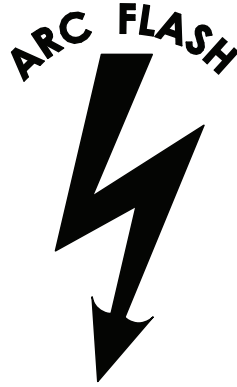

SPECIFICATIONS

Model No.	Harness Connector	Anchorage Connector	Lifeline	Length	Approx. Weight
C911800	Steel Snap Hook	Aluminum Mega Hook	1¾ in Kevlar® Web	6 ft (1.8 m)	7.8 lbs (3.5 kg)

COMPLIANCE STANDARDS

Meets	Maximum Arrest Distance	Average Arrest Force	Maximum Arrest Force	Free Fall Limit	Capacity
ANSI Z359.13-2013	48 in (1.2 m)	900 lbf (4 kN)	1,800 lbf (8 kN)	6 ft (1.8 m)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140 & 1926.502	42 in (1,067 mm)	N/A	1,800 lbf (8 kN)	6 ft (1.8 m)	310 lbs (141 kg)

*See User Instructions for more information.

⚠ WARNING: Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet